
ASSEMBLY AND INSTALLATION INSTRUCTIONS

C0238

WARNING: TO AVOID RISK OF ELECTRICAL SHOCK, BE SURE TO SHUT OFF POWER BEFORE INSTALLING OR SERVICING THIS FIXTURE.

NOTE: 1. Before installing, consult local electrical codes for wiring and grounding requirements.

2. READ AND SAVE THESE INSTRUCTIONS.

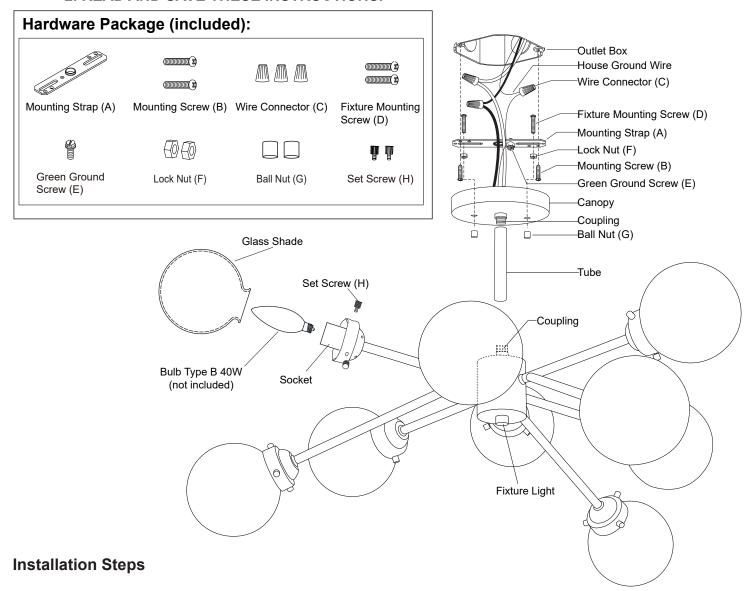

Turn off the power at fuse or circuit box

- 1. Attach two fixture mounting screws (D) to the mounting strap (A), then secure it with two lock nuts (F). Adjust the length of the fixture mounting screws (D) if necessary.
- 2. Attach the mounting strap (A) to the outlet box using two mounting screws (B).
- 3. Rotate coupling of the fixture light and the canopy into the both ends of the tube.



- 4. Pull out the source wires from the outlet box. Make wire connections using wire connector (C) as follows:
 - ---Connect the black wire from the fixture to the black wire from the power source.
 - ---Connect the white wire from the fixture to the white wire from the power source.
 - ---Attach the fixture ground wire to the mounting strap (A) with the green ground screw (E), then connect it to the house ground wire with a wire connector (C).

Carefully put the wires back into the outlet box.

- 4. Install the bulbs (not included). Check relamping label at socket area or packaging for maximum wattage allowed .
- 5. Attach the glass shade onto the socket and tighten it with set screws (H).
- 6. Attach the canopy onto the outlet and tighten it with two ball nuts (G).

Turn on the power at fuse or circuit box

The following parts are available for re-order if damaged or missing.

